

VACUUM DOUBLE CHAMBER

Models | 420A | 600A | 620A | 650A | 680A | 700A

HEAVY-DUTY

This high-quality, user-friendly, and easy to clean machine integrates heavy-duty parts, thereby providing great reliability.

HIGH PERFORMANCE

Productivity is twice increased with the double chambers that eliminate waiting times.

EFFICIENCY

This model is designed to package large volumes of oversized products. The modified atmosphere packaging (MAP) option helps extend the shelf-life of food products and eliminates preservatives. A selection of pumps is offered (optional).

WHY SHOULD YOU VACUUM PACK ?

- 1 To reduce spoilage by removing air from the package resulting in much longer shelf life;
- 2 To prevent dehydration;
- 3 For ease of handling;
- 4 To slow down oxidation;
- 5 To protect against external contamination.



MODEL 420A

SEAL BARS	Length	A	19.1" / 485 mm
	Qty		4
	Distance between	B	18" / 457 mm
CHAMBER DIMENSIONS	Height		8" / 203 mm
BUSCH PUMP	Std.		40 m ³ 2.0 HP
	Width	E	55.75" / 1,416 mm
	Depth	F	31" / 787 mm
MACHINE DIMENSIONS	Height	G	43" / 1,092 mm
POWER SUPPLY			208-220 V / 3 pH / 60 Hz
MICROPROCESSOR			MC-40

VACUUM DOUBLE CHAMBER

Models | 420A | 600A | 620A | 650A | 680A | 700A



MODELS 600A, 620A AND 650A

		600A	620A	650A
SEAL BARS	Length A	26.0" / 660 mm	26" / 664 mm	33.5" / 855 mm
	Qty	4	4	4
	Distance between B	22.5" / 572 mm	28" / 711 mm	31" / 787 mm
CHAMBER DIMENSIONS	Height	8" / 203 mm	8" / 203 mm	8" / 203 mm
BUSCH PUMP	Std.	100 m ³ 5.0 HP	100 m ³ 5.0 HP	165 m ³ 7.5 HP
MACHINE DIMENSIONS	Width E	68" / 1,727 mm	68" / 1,727 mm	85" / 2,159 mm
	Depth F	36" / 914 mm	39.5" / 1,003 mm	49" / 1,245 mm
	Height G	47" / 1,194 mm	47" / 1,194 mm	47" / 1,194 mm
POWER SUPPLY		208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz
MICROPROCESSOR		MC-40	MC-40	MC-40




MODELS 680A AND 700A

		680A	700A
SEAL BARS	Length A	33.5" / 855 mm	33.5" / 855 mm
	Qty	4	4
	Distance between B	31" / 787 mm	31" / 787 mm
CHAMBER DIMENSIONS	Height	8" / 203 mm	8" / 203 mm
BUSCH PUMP	Std.	165 m ³ 7.5 HP	165 m ³ 7.5 HP
MACHINE DIMENSIONS	Width E	85" / 2,159 mm	85" / 2,159 mm
	Depth F	49" / 1,245 mm	45" / 1,145 mm
	Height G	47" / 1,194 mm	51" / 1,295 mm
POWER SUPPLY		208-220 V / 3 pH / 60 Hz	208-220 V / 3 pH / 60 Hz
MICROPROCESSOR		MC-40	MC-40


VACUUM DOUBLE CHAMBER

Models | 420A | 600A | 620A | 650A | 680A | 700A

2 SEAL BARS / CHAMBER

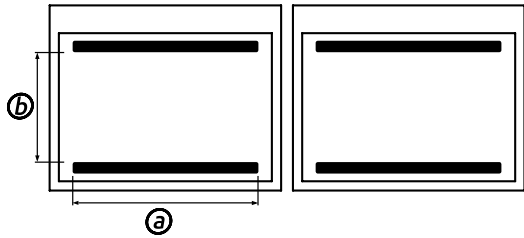

MC-40



BASIC FEATURES

- Double chamber
- Stainless steel construction
- Twin seal element – Double seam band
- Vacuum sensor - Vacuum level controlled in percentage directly with Microprocessor
- Filler plates
- Wheels (stainless steel) – 420A, 600A, 620A, 650A
- Legs (stainless steel) – adjustable 680A, 700A
- Rear panel
- Crate
- Certification; ETL listed C & US (CSA & UL)

OPTIONAL FEATURES

- Electric cut-off - Two wire seal system which outside wire cuts off excessive part of bag
- Bi-active seal - Sealing from top and bottom for thick pouches and aluminum bags (except model 420A)
- Gas injection system (MAP) - For fragile products, presentation and extending shelf life
- Air regulator – Regulated air pressure in the seal bars bladders with compressed air (not included) (except model 400)
- Adjustable venting system - Controlled decompression of the vacuum chamber
- 12" (305 mm) chamber lid (except model 420A)
- Vacuum pump sizes
- Rear conveyor (model 700A)
- Inclined stainless steel filler plates for liquid (except model 700A)
- Silencer
- Other voltages available
- Heated control box for microprocessor
- Service kit for standard maintenance

All features are subject to change without notice.

